

Improving Dynamic Performance of Automatic Generation Control of Interconnected Power System by Combing Parallel EHV AC/ HV DC link

Emad Ali Daood¹, Surya Prakash², Jyoti Shrivastava³

Assistant Lecturer in Electrical Department Branch Power in Technical Institute Basarah, Iraq¹

Electrical Engineering Dept., Shephard School of Engineering & Technology, SHIATS-Deemed University, Allahabad^{2,3}

Abstract: This paper deals with load frequency control of 2 area interconnected Thermal power systems with EHVAC/HVDC links when subjected to small step load perturbations. For the present study, power system model consists of two areas thermal power plants having identical capacity. The system interconnection is considered namely (I) EHVAC transmission link only (II) EHVAC in parallel with HVDC transmission link. The HVDC link is considered to be operating in constant current control mode. To carry out the investigations, optimal AGC regulators are designed using proportional-plus-integral control strategy and implemented on the system under consideration in the wake of 1% step load perturbation in thermal area. The system responses will be simulated in Mat lab. Responses of deviation in frequencies, deviation in tie line power and integral of area control errors are plotted. By comparing the responses of the two model developed, one by using HVDC link and another without using HVDC link, the frequency deviation and settling time is lesser than without using HVDC link. Therefore by combining the transmission line by using HVDC link provides better dynamic performances in terms of overshoot and settling time.

Keywords: Interconnected power systems; System dynamic performance; EHVAC//HVDC transmission link, MATLAB

I. INTRODUCTION

Large scale power systems are normally divided into control areas based on the principle of coherency. The coherent areas are interconnected through tie-lines which are used for contractual energy exchange between areas and provide inter-area support during abnormal operations. The successful operation of interconnected power systems requires the matching of total generation with total load demand and associated system losses. With time, the operating point of a power system changes, and hence, these systems may experience deviations in nominal system frequency and scheduled power exchanges to other areas, which may yield undesirable effects. There are two variables of interest, namely, frequency and tie-line power exchanges. Their variations are weighted together by a linear combination to a single variable called the ACE. During the last few decades, considerable generation controllers for interconnected power systems[1-5]

Electric power systems consist of a number of control areas, which generate power to meet the power demand. However, poor balancing between generated power and demand can cause the system frequency to deviate away from the nominal value and create inadvertent power exchange between control areas. To avoid such situation, load

frequency controllers are designed and implemented to balance generated power and demand in each control area automatically. Frequency control as a major function of automatic generation control is one of the important control problems in electric power system design and operation, and is becoming more significant today because of the increasing size, changing structure, emerging new uncertainties, environmental constraints and the complexity of power systems. In the last two decades, many studies have focused on damping control and voltage stability and the related issues, but there has been much less work on the power system frequency control analysis and synthesis. While some aspects of frequency control have been illustrated along with individual chapters, many conferences and technical papers, a comprehensive and sensible practical explanation of robust frequency control in a book form is necessary[6-7].

This paper provides a thorough understanding of the basic principles of power system frequency behavior in wide range of operating conditions. It uses simple frequency response models, control structures and mathematical algorithms to adapt modern robust control theorems with frequency control issue and conceptual explanations.

The objective of the present work is as follows:

- i) To develop the model of single area and two area interconnected power system combining EHV AC/ HV DC link.
- ii) To design different controllers and implement it in two area interconnected power system.
- iii) To simulate and investigate the performances of each controllers with and without HV DC link.

II. LOAD FREQUENCY CONTROL IN TWO AREA POWER SYSTEM

Automatic Generation Control (AGC) is used in real-time control to match the area generation changes to area load changes in order to meet tie-line flows and keep frequency at nominal value. By processing frequency and tie line deviations, AGC can determine whether the load changed in its own area or in its neighbor's area. If the former, the generations of units under AGC is adjusted until the deviations becomes zero. The AGC problem of interconnected system is not only to see that the generation balances the demand but also to allocate generation between various systems, so that the total system operation schedules are kept up. Thus in interconnected system either executed manually or automatically, the function of AGC is to reallocate the generation changes to pre-selected machines after an initial random accommodation of the load by governor action. It is necessary to obtain much better frequency constancy than obtained by speed governor itself. To accomplish this we must overcome speed changes in accordance with some suitable control strategy. In practice different conventional control strategies are utilized for AGC viz., Proportional and Integral (PI), Proportional, Integral and Derivative (PID) and Optimal control. The PI controller improves steady state error simultaneously allowing a transient response with little or no overshoot. As long as error remains, the integral output will increase causing the speed changer position, attains a constant value only when the frequency error has reduced to zero. So it introduces oscillations into the system. The PID controller improves the transient response so as to reduce error amplitude with each oscillation and then output is eventually settled to a final desired value.

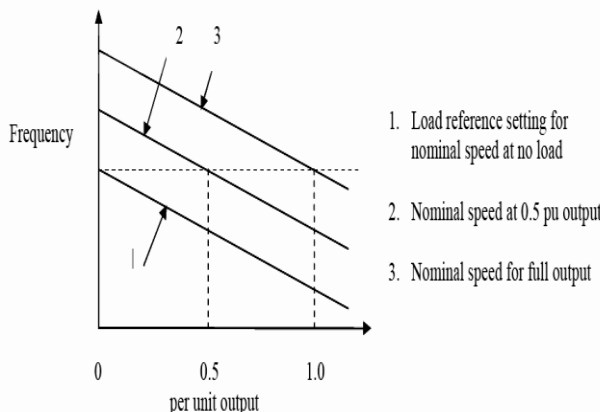


Fig. 1 Variation of frequency with p.u output

Governor characteristics point. By adjusting this set point on each unit a desired unit dispatch can be maintained while holding system frequency close to the desired nominal value. R is equal to p.u change in frequency, divided by p.u change in unit output. That is,

$$R = \frac{\Delta\omega}{\Delta P} \text{ p.u} \tag{1}$$

Model of system frequency:

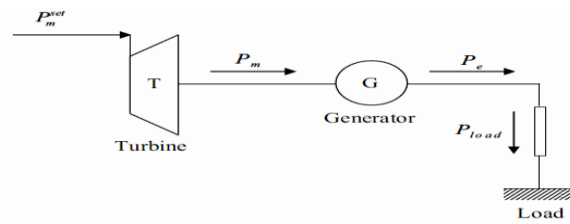


Fig. 2 Simplified representation of a power system consisting of single generator connected to the same bus as the load.

Suppose that this generator experience a step increase in load,

$$\Delta P_L(s) = \frac{\Delta P_L}{s} \tag{2}$$

The transfer function relating the load change ΔP_L , to the frequency change $\Delta\omega$ is

$$\Delta\omega(s) = \Delta P_L(s) \left[\frac{-1}{Ms + D} \left(1 + \frac{1}{R} \left(\frac{1}{1 + sT_G} \right) \left(\frac{1}{1 + sT_{CH}} \right) \left(\frac{1}{Ms + D} \right) \right) \right] \tag{3}$$

The steady state value of $\Delta\omega(s)$ may be found by: steady state = $\lim [s \Delta\omega(s)]$

$$\Delta\omega \text{ steady state} = \frac{-\Delta P_L}{\frac{1}{R} + D} \tag{4}$$

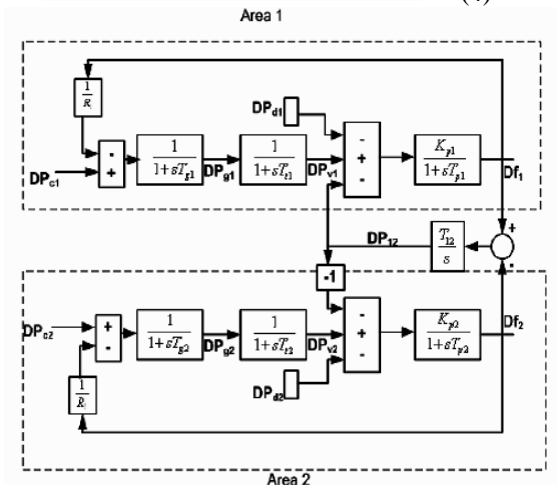


Fig. 3. Transfer function model of two-area thermal system

Automatic Generation Control (AGC) or Load Frequency Control is a very important issue in power system operation and control for supplying sufficient and reliable electric power with good quality. An interconnected power system can be considered as being divided into control area, all generators are assumed to form a coherent group. In the steady state operation of power system, the load demand is increased or decreased in the form of Kinetic Energy stored in generator prime mover set, which results the variation of speed and frequency accordingly. Therefore, the control of load frequency is essential to have safe operation of the power system. Automatic generation control (AGC) is defined as, the regulation of power output of controllable generators within a prescribed area in response to change in system frequency, tie-line loading, or a relation of these to each other, so as to maintain the schedules system frequency and the established interchange with other areas within predetermined limits. Therefore, a control strategy is needed that not only maintains constancy of frequency and desired tie-power flow but also achieves zero steady state error and inadvertent interchange. Among the various types of load frequency controllers, the most widely employed is the conventional proportional integral (PI) controller. The PI controller is very simple for implementation and gives better dynamic response.

III. TIE-LINE MODELLING

From power flow equation:

$$P_i = \sum_{k=1}^n |V_i| |V_k| B_{ik} \sin(\theta_i - \theta_k) \quad (5)$$

Approximate at normal operating condition, we have

$$P_i \approx \sum_{k=1}^n B_{ik} (\theta_i - \theta_k) \quad (6)$$

Then, for small change,

$$\Delta P_i \approx \sum_{k=1}^n B_{ik} (\Delta \theta_i - \Delta \theta_k) = \sum_{k=1}^n T_{ik} (\Delta \theta_i - \Delta \theta_k) \quad (7)$$

Where T_{ik} is called stiffness or synchronizing power coefficient

$$\Delta P_i = \sum_{k=1}^n T_{ik} (\Delta \theta_i - \Delta \theta_k) \quad (8)$$

And $\Delta \theta = \frac{1}{s} \Delta \omega$

$$\Delta P_i = \sum_{k=1}^n \frac{T_{ik}}{s} (\Delta \omega_i - \Delta \omega_k) \quad (9)$$

IV. AREA CONTROL ERROR: TIE-LINE BIAS CONTROL

In reality a control area is interconnected not with one tie-line or to one neighbouring area but with several tie-lines to neighbouring control areas, all part of the overall power

pool. Consider the i^{th} control area. Its net interchange equals the sum of megawatts on all m outgoing tie-lines. As the area control error ACE_i ought to be reflective of the total power it should thus be chosen of the form

$$ACE = \sum_{j=1}^m \Delta P_{ij} + B_i \Delta f_i \quad (10)$$

- Use ACE is to adjust setting control power of each area.

- To drive ACE in all area to zero.

-To send appropriate signal to setting control power,

- Use integrator controller so that ACE goes to zero at steady state.

Steady state is reached when frequency is back at the operating point and generator in area 2 takes its own load.

A. INTEGRAL CONTROLLER

This mode represents a natural extension of principal of floating control in the limit of infinitesimal changes in the rate of controller output with infinitesimal changes in error. This mode is also referred to as reset action. It involves integration of the error signal over a period of time. The rate of change of correcting signal is proportional to the error.

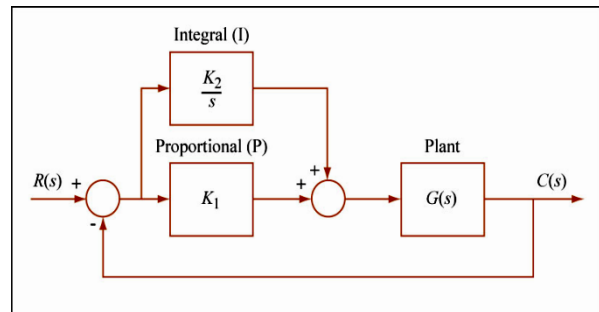


Fig. 4 Block diagram PI controller

The transfer function of this controller is

$$G(s) = Kp + \frac{Ki}{s}$$

And,

$$I = (1/K_i) E_p(t) dt + P_o$$

Where,

K_i = integral time.

$1/K_i$ = reset rate.

E_p = error.

P_o = controller output at $t = 0$.

In this mode, the controller will continue to take the control action as long as the control error exists and any offset error, caused by load changes, is eliminated. The above equation can be simplified as:-

$$I = (E_1/K_i) + (E_2/K_i) + (E_3/K_i)$$

$$I = 1/K_i (\sum_{n=1}^N E_n)$$

We see that faster rate provided by K_i causes a much greater controller output at a particular time after the error is generated.

V. RESULT AND DISCUSSION

The following configurations are identified for power system model:

- (i) EHVAC link is used as a system interconnection.
- (ii) EHVAC link in parallel with HVDC link is used as a system interconnection.

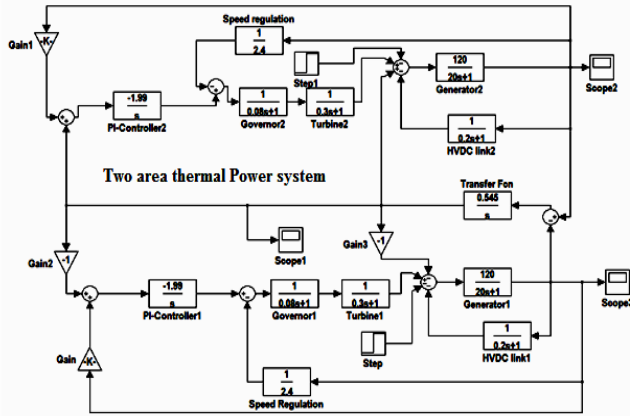


Fig.5 MATLAB model of the interconnected thermal power system by using HVDC link and tie line

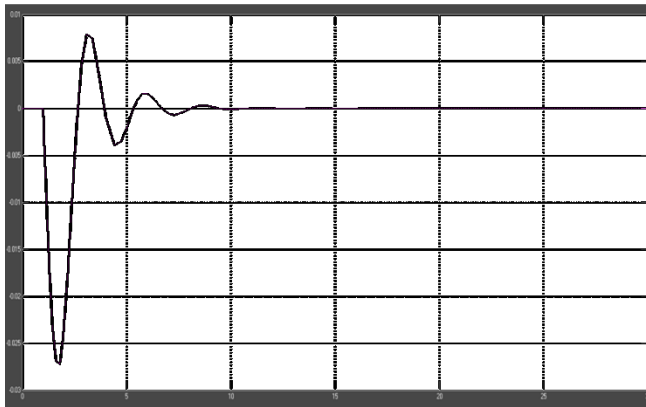


Fig.6 Response of change in frequency interconnected thermal power system without using HVDC link

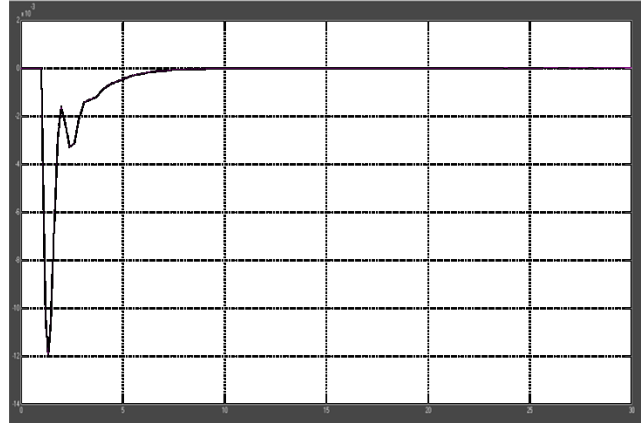


Fig. 7 Response of change in frequency interconnected thermal power system with using HVDC link

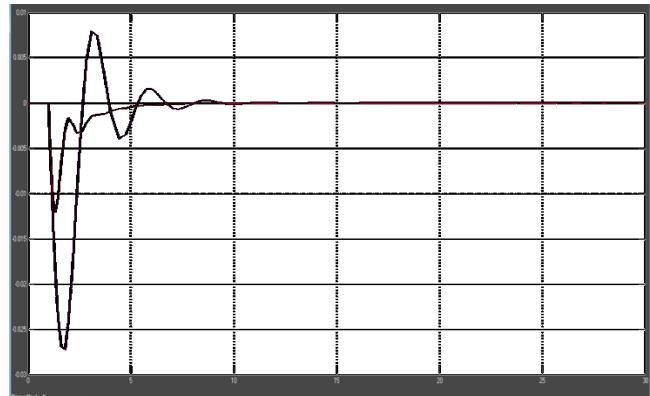


Fig.8 Combined Response of change in frequency of the interconnected thermal system by using HVDC link and without using HVDC link.

TABLE: 1. COMPARATIVE STUDY OF SETTLING TIME

Configuration	Area 1 (sec)	Area 2 (sec)	Steady error
With EHV AC link	12	12	Zero
With EHV AC/DC link	08	08	Zero

TABLE: 2. COMPARATIVE STUDY OF PEAK OVERSHOOTS

Configuration	Δf Area 1 (pu)	Δf Area 2 (pu)	Steady State error
With EHV AC link	-0.025	-0.025	Zero
With EHV AC/DC link	-0.012	-0.012	Zero

VI. CONCLUSION

Two cases have been studied for 2-area interconnected thermal power system. One without HVDC link and another by combining EHV AC/ HV DC link. By comparing table 1 and table 2, it is inferred that (i) with EHVAC links, deviation in frequencies, and integral of area control errors

have large overshoot & settling time subjected to 1% step load disturbance in thermal area. (ii) With parallel EHVAC/HVDC links, all responses have been improved in terms of settling time, overshoot & steady state error subjected to 1% step load disturbance.

APPENDIX A

NOTATIONS:

i = Subscript referring to area ($i=1, 2$)
 ΔX_{gi} = Incremental change in governor valve position of i th area
 ΔP_{ci} = Incremental change in speed changer position of i th area
 ΔP_{gi} = Incremental change in power generation of i th area
 ΔP_{di} = Incremental change in load demand of i th area (p.u. MW/Hz)
 ΔF_i = Incremental change in frequency of i th area
 ΔP_{tiei} = Incremental change in tie-line power flow of i th area (MW)
 ΔP_{dci} = Incremental change in DC link power flow of i th area
 ΔP_{ri} = Incremental change in reheat turbine output of i th area
 f_0 = Nominal system frequency (Hz)
 H_i = per unit inertia constant of i th area (sec)
 D_i = Load frequency constant of i th area (p.u. MW/Hz)
 R_i = Speed regulation parameter of i th area (Hz/p.u. MW)
 B_i = Frequency bias constant of i th area (p.u. MW/Hz)
 K_{gi} = Speed governor gain of i th area
 T_{gi} = Speed governor time constant of i th area (sec)
 K_{ri} = Reheat turbine gain
 K_{dc} = DC-Link gain
 T_{dc} = DC-Link time constant (sec)
 P_{ri} = Rated power output of i th area
 Δ_i = Power angle of i th area
 P_{max} = Maximum rated power
 T_{12} = Synchronizing coefficient of AC link
 a_{12} = Area size ratio coefficient
 ACE = Area Control Error
 $IACE_i$ = Integral Area Control Error of i th area.
 AGC = Automatic Generation Control
 LFC = Load Frequency Control
 MW = Mega Watt
 $EHVAC$ = Extra High Voltage Alternating Current
 $HVDC$ = High Voltage Direct Current
 PI = Proportional Integral Control

APPENDIX B:

Numerical data

For Thermal Plant

$P_{r1} = P_{r2} = 2000$ MW; $D_1 = D_2 = 0.00833$ p.u. MW/Hz;
 $M_1 = M_2 = 0.167$ pu MW/Hz; $R_1 = R_2 = 2.4$ Hz p.u. MW; $B_1 = B_2 = 0.425$ p.u. MW/Hz; $T_{g1} = T_{g2} = 0.08$ Sec; $T_{t1} = T_{t2} = 0.3$ sec; $a_{12} = -1$;
 $\Delta P_{d1} = 0.01$; $\Delta P_{d2} = 0.00$; $K_{r1} = K_{r2} = 0.5$; $T_{r1} = T_{r2} = 10$ Sec;

AC& DC Link $P_{max} = 200$ MW (10% of Rated Power);
 $2 * \pi * T_{12} = 2 * \pi * T_{23} = 2 * \pi * T_{31} = 0.545$
 $a = \delta_1 - \delta_2 = \delta_2 - \delta_3 = \delta_3 - \delta_1 = 30^\circ$;
 $K_{dc1} = K_{dc2} = K_{dc3} = 1.0$; $T_{dc1} = T_{dc2} = T_{dc3} = 0.2$ Sec;

REFERENCES

- [1] S. Ramesh, A Krishnan, ' Fuzzy Rule based load frequency control in a parallel AC-DC interconnected power system through HVDC link', International Journal of computer Application(0975-8887), Vol. 1-No.4, Pp 78087.
- [2] Prabhat Kumar, Ram Naresh Mishra 'Optimal Control Of 3-Area Interconnected Hydro-Thermal Power Systems With EHVAC/HVDC Links', *Xxxii National Systems Conference, Nsc 2008, December 17-19, 2008*
- [3] Fosha C.E., and Elgerd O.I., "The megawatt-frequency control problem: a new approach via optimal control theory", *IEEE Trans., PAS-89, 1970, pp.563-577.*
- [4] IEEE Committee Report, "Dynamic models for steam and hydro turbines in power system Studies", *IEEE Trans., PAS-92, 1973, pp. 1904- 1915.*
- [5] M Calovic, "linear regulator design for a load and frequency control", *IEEE transactions, PAS (91), Nov/Dec 1972, pp. 2271-2285.*
- [6] M.L. Kothari, Prof. J. Nanda, "Application of optimal control Strategy to Automatic generation control of a hydrothermal system", *IEE proceedings, Vol. 135, Pt. D, No. 4, July 1988, pp.268- 274.*
- [7] Prabhat Kumar, K E Hole' and R P Aggarwal, "Design of suboptimal AGC Regulator for Hydro-Thermal Power System". *IE (I) Journal. pt EL6, June 1983 ,pp 304-309.*
- [8] Ibraheem, P Kumar and S Ahmad, "Dynamic Performance Enhancement of Hydro-Power Systems with Asynchronous Tie-lines". *IE (I) Journal Vol 85, June 2004 pp. 23-34.*
- [7] O. I. Elgerd and C. Fosha, "Optimum megawatt frequency control of multi-area electric energy systems," *IEEE Trans. Power App. Syst., vol. PAS-89, no. 4, Apr. 1970, pp. 556-563.*
- [8] T. E. Bechert and N. Chen, "Area automatic generation control by multipass dynamic programming," *IEEE Trans. Power App. Syst., vol. PAS-96, no. 5, Sep./Oct. 1977, pp. 1460-1468.*
- [9] Ibraheem, Prabhat Kumar, and Dwarka P.Kothari, "Recent Philosophies of Automatic Generation Control Strategies in Power Systems", *IEEE transactions on power systems, vol. 20, no. 1, February 2005, pp.346-357.*
- [10] IEEE PES Working Group, Hydraulic turbine and turbine control models for system dynamic," *IEEE Trans. Power Syst., vol. PWRS-7, no. 1, Feb. 1992, pp. 167-174,*
- [11] IEEE Committee Report, "Standard definitions of terms for automatic generation control on electric power systems", *IEEE Trans. Power App. Syst., vol. PAS-89, Jul. /Aug. 1970, pp.7-11.*
- [12] E.V. Bohn, S.M. Miniesy, "Optimum load-frequency continuous control with unknown Deterministic power emand", *IEEE committee report, 1971, pp.1910- 1915.*
- [13] Ibraheem & Prabhat Kumar, "Study of Dynamic Performance of Power Systems with Asynchronous Tie-lines considering Parameter Uncertainties", *IE (I) Journal vol83, June 2004, pp.35-42.*
- [14] Ibraheem & Prabhat Kumar, "Current Status of the Indian Power Systems and Dynamic Performance Enhancement of Hydro Power Systems with Asynchronous Tie Lines", *Electric Power Components & Systems 2003, pp.605-626.*

BIOGRAPHIES



Emad Ali Daood born on 6th Oct. 1967 in Iraq. He has completed B.Sec. in Electrical Engineering from University of Baserah, Iraq. Presently he is working as Asst. Lecture in Electrical Department Branch Power in Technical Institute Basarah, Iraq.



Dr. Surya Prakash belongs to Allahabad, DOB is 01.05.1971, Received his Bachelor of Engineering degree from The Institution of Engineers (India) in 2003, He obtained his M.Tech. In Electrical Engg.(Power System) from KNIT, Sultanpur. UP-India in 2009, and he has obtained Ph. D in Electrical Engg.(Power System) from, SHIATS (Formerly Allahabad Agriculture Institute, Allahabad-India). His field of interest includes power system operation & control, Artificial Intelligent control.



Dr. Jyoti Shrivastava has done her graduation in Electrical Engineering and her post graduation in Design of Heavy Electrical Equipments . At present she is serving as an Senior Assistant Professor in Electrical Engineering department at college of Engineering and Technology, SHIATS, Allahabad, India. She has several international and National papers to her credit.